


NETJET 350D

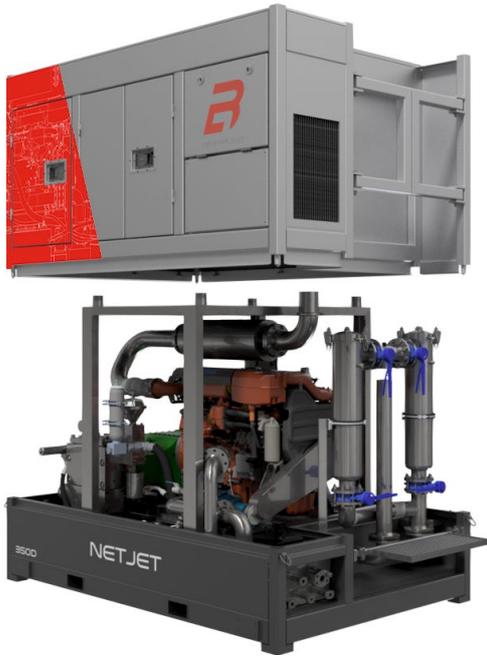

NETJET 350D

The NETJET 350D is a pump unit designed in conjunction with industry experts for Aquaculture net cleaning in the harshest environments.

- **KAMAT High Pressure Pump**
- **Scania DI09 Marine Engine**
- **9" Digital Display + Radio Remote**
- **Stainless Steel Fuel Tank**
- **Externally Mounted Duplex Filters**

The unit features a KAMAT High Pressure Plunger pump, driven by a Scania DI09 Marine engine. Reliability and ease of maintenance are key drivers behind the design, hence the externally mounted duplex filters, air filtration and completely removeable canopy.

Toftills Avenue, Midmill Business Park,
Kintore, Aberdeenshire, Scotland, AB51 0QP, UK
+44 (0) 1467 633805
info@brimmond.com




www.brimmond.com

WORK AREA CLASSIFICATION



TECHNICAL SPECIFICATION - STANDARD SUPPLY

MOTOR TYPE	DI09 070M. 257 kW (350 hp), IMO Tier II, EU Stage IIIA
STARTER	Key Start—Battery (24v)
ENGINE POWER	257kW @ 1800 rpm 1600Nm @ 1200 rpm
HIGH PRESSURE PUMP	KAMAT K25065MC-3G
PUMP OUTPUT	Maximum Flow Rate: 500lpm - Maximum Pressure: 230 Bar Specified for: 500lpm @ 230 Bar @ 1934rpm
TRIPLEX PUMP CONTROL	Variable Flowrate: 250-500lpm Variable Pressure: 50-230 Bar
CANOPY	Marine Grade Aluminium Canopy (Removeable), Sound Attenuating Foam, Air Inlet filtration
BOOST PUMP	Belt Driven Stainless Steel Centrifugal Pump Single rubber bellows mechanical seal
COOLING	Seawater cooled
FUEL TANK	290L Useable Volume, Stainless Steel, Low Level Shut Off
FLUID TYPE	Saltwater / Fresh Water
FILTRATION	Duplex 4" 316SS Filter Pots - 315 Micron mesh basket Vent and Drain connections - Duty and Standby. Isolations allowing live filter change outs
CONTROL PANEL CONTROLS	Engine Start / Stop - Engine Speed Control Emergency Stop - Pneumatic Pressure Regulator
CONTROL PANEL INSTRUMENTATION	Engine Speed - Pump Output Pressure - Pump Output Flowrate Engine and Pump Diagnostics - Low Boost Pressure Alarm
SAFETY FEATURES	Pressure Safety Valve Local and Remote Emergency Stop
BULKHEAD CONNECTIONS	Configurable to customer requirements
MOVING & HANDLING	4 Point Overhead Lift - Forklift Pockets Sacrificial Deck Tiedowns - D-Ring Lashing Points
DIMENSIONS	3000mm (L) x 1500mm (W) x 2350mm (H)
WEIGHT	4,500kg

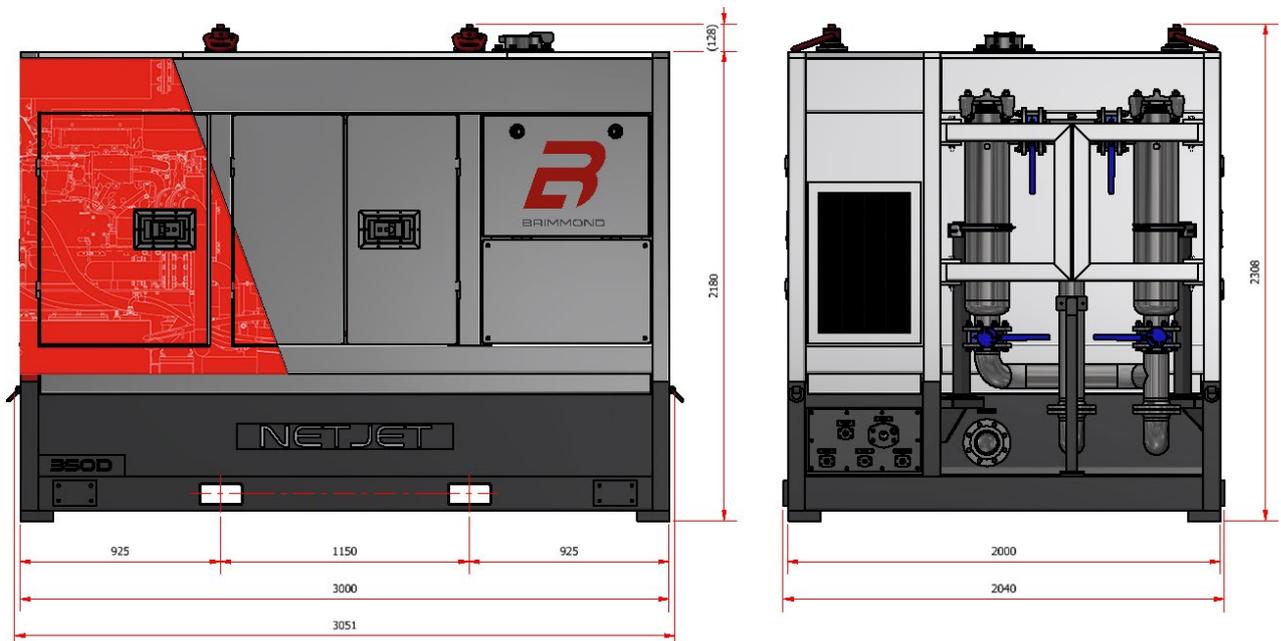

All information is correct at the time of printing, Brimmond reserves the right to make any changes to the above specification, without prior notice, with no impact on the overall unit performance

BGF-184

*other flow and pressures available on request

BRIMMOND